



100% WOOD



POSSIBILITY OF PAINTING



HIGH SCRATCHES AND DIRT RESISTANCE



EASY ASSEMBLY WITH CLIPS




DUCTS FOR CABLES



HIGH MOISTURE RESISTANCE

## TECHNICAL SPECIFICATION FOR P6P VENEERED SKIRTING BOARD

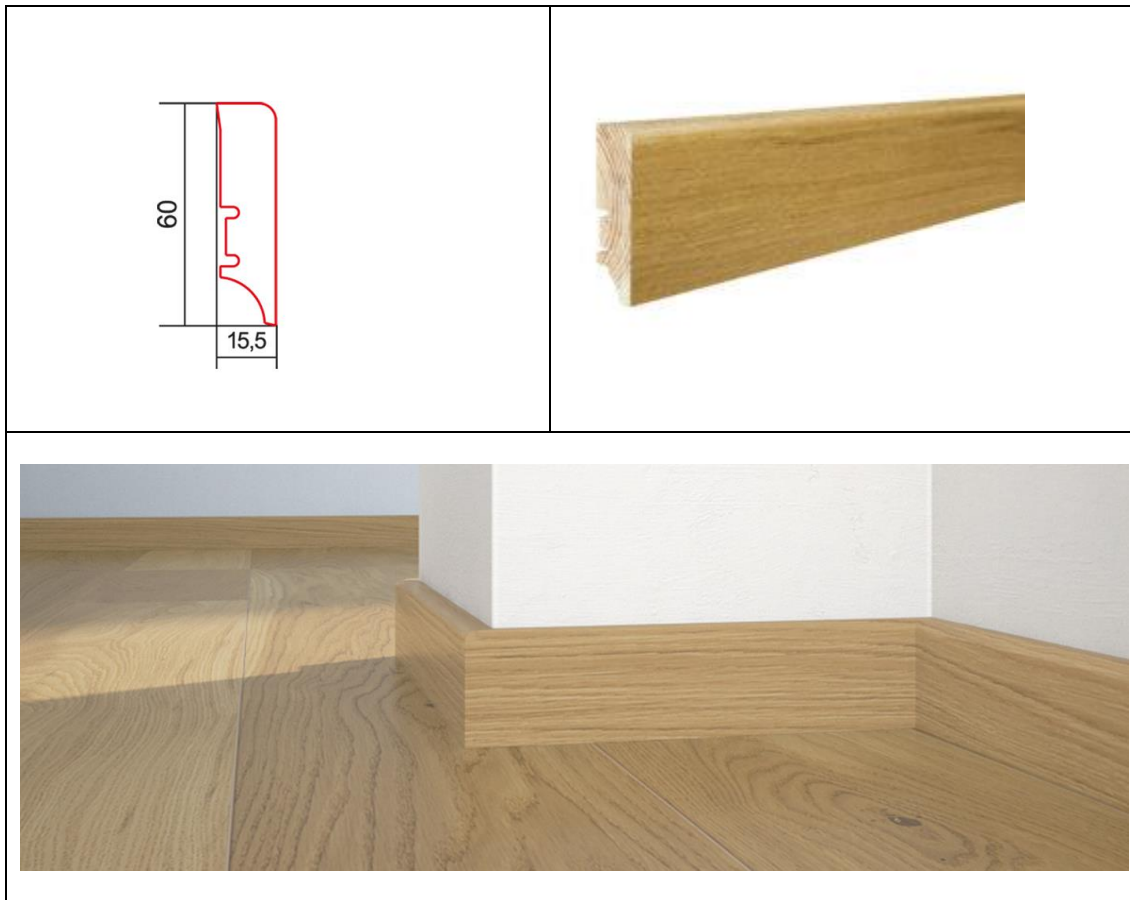


## MATERIAL / APPEARANCE

Skirting boards made of 100% wood, covered with veneer on the outside

### Skirting board cross-section:

1. Varnish layer
2. Natural hardwood veneer
3. Non-woven layer.
4. Softwood core (pine) without knots.
5. Place for mounting clips.
6. Cable cutout.
7. Dampproof insulation with varnish on the bottom.

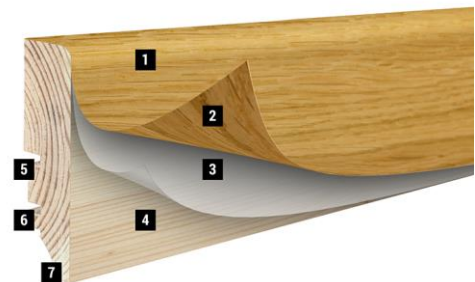

## APPLICATION

Skirting boards are made entirely of natural coniferous wood, finger-jointed, which guarantees their extraordinary durability. The decorative surface and the edges of the slats are veneered entirely along the length of the slat. Wooden skirting boards are the best finish for a floor made of Barlinek boards, panels or tiles. They are extremely functional and very dimensionally stable.



100% WOOD



POSSIBILITY OF PAINTING



HIGH SCRATCHES AND DIRT RESISTANCE



EASY ASSEMBLY WITH CLIPS



















DUCTS FOR CABLES



HIGH MOISTURE RESISTANCE

### COLOUR OF THE SURFACE LAYER

Index/EAN code/ catalogue number	Illustrative photo of the color of the skirting board*	Index/EAN code/ catalogue number	Illustrative photo of the color of the skirting board*
Index: LIS-DBE-OLE-220-060-P6P Catalogue no: P6P01091A EAN code: 5906737984956		Index: LIS-DBE-ORR-220-060-P6P Catalogue no: P6P01482A EAN code: 5906737991114	
Index: LIS-DBE-LAK-220-060-P6P Catalogue no: P6P01011A EAN code: 5906737985007		Index: LIS-DBE-COG-220-060-P6P Catalogue no: P6P01472A EAN code: 5906737990810	
Index: LIS-DBE-CR2-220-060-P6P Catalogue no: P6P01312A EAN code: 5906737991046		Index: LIS-DBE-DLL-220-060-P6P Catalogue no: P6P01072A EAN code: 5906737990889	
Index: LIS-DBE-POP-220-060-P6P Catalogue no: P6P01242A EAN code: 5906737991053		Index: LIS-DBE-BI2-220-060-P6P Catalogue no: P6P01331A EAN code: 5906737930519	
Index: LIS-DBE-P7R-220-060-P6P Catalogue no: P6P01492A EAN code: 5906737991060		Index: LIS-DBE-BI4-220-060-P6P Catalogue no: P6P01351A EAN code: 5906737945667	
Index: LIS-DBE-BI3-220-060-P6P Catalogue no: P6P01342A EAN code: 5906737991077		Index: LIS-DBE-BRG-220-060-P6P Catalogue no: P6P01301A EAN code: 5906737945674	
Index: LIS-DBE-W2R-220-060-P6P Catalogue no: P6P01422A EAN code: 5906737991084		Index: LIS-DBE-LB5-220-060-P6P Catalogue no: P6P01031A EAN code: 5906737991015	
Index: LIS-DBE-TER-220-060-P6P Catalogue no: P6P01212A EAN code: 5906737991091		Index: LIS-JES-LB5-220-060-P6P Catalogue no: P6P02031A EAN code: 5906737945681	

### CHARACTERISTICS/ INSTALLATIONS

The humidity of the skirting board:	9% +/-2%
Assembly:	We recommend the use of “Barlclips” mounting clip. A detailed mounting instructions of skirting boards can be found on <a href="http://www.Barlinek.com">www.Barlinek.com</a> and in the mounting instructions of Barlinek’s floorboards.
Intended use:	Rooms inside buildings with a relative air humidity of 45% to 60%
Permissible bend deflection of a skirting board:	22 mm/ 2200mm of the length
Blue stain of pine wood	Permissible, up to 50% of the wood surface



100% WOOD



POSSIBILITY OF PAINTING



HIGH SCRATCHES AND DIRT RESISTANCE



EASY ASSEMBLY WITH CLIPS



DUCTS FOR CABLES



HIGH MOISTURE RESISTANCE

### THE DIMENSIONS OF AN INDIVIDUAL ELEMENT

Length:	2200mm Due to the lack of impact of this parameter on the mounting: Applicable tolerances are the following: <ul style="list-style-type: none"> <li>• one skirting board in a package can have a +/-10mm length variation</li> <li>• two skirting boards in a package can have a +/-5mm length variation</li> </ul>
Width:	15,5mm (+/-0.5mm)
Height:	60mm (+/-0.5mm)

### PACKAGE / WEIGHT

The weight of one skirting board	0,946 kg
The number of skirting boards in the package:	10pcs. = 22m
The weight of one package:	9,66 kg
Number of packages per pallet:	78 packages.
Pallet weight (skirting boards + a pallet):	775,68 kg
The dimensions of one pallet (H/W/L)	1320mm x 830mm x 2200mm

### DESCRIPTION OF THE SURFACE LAYER

Healthy knots	Acceptable up to 10 mm in diameter
Colour scheme of surface layer	Any, varied
Silver grains (only for oak)	Acceptable , without limit
Sapwood (only for oak)	Acceptable (only for oak in color) Unacceptable (only for transparent oak)
Arrangement of fibres	Varied
Veener joints	Max. 3 veneer joints of a similar colour on one skirting board. Acceptable 1 skirting board with a visible joint

*\*NOTE: Skirtings boards are produced exclusively from genuine wood. Because of the natural variation in the raw material, the individual skirtings boards and their surface may differ in color, shade, the intensity of knots and grain pattern. Sample boards, samples, photo- graphs and merchandising brochures may not fully correspond to the actual appearance of the products. The color of the product delivered may be different from the material available at the point of sale.*

Prepared – 25.05.2023