





TECHNICAL SPECIFICATION FOR PW95 PAITED SKIRTING BOARD

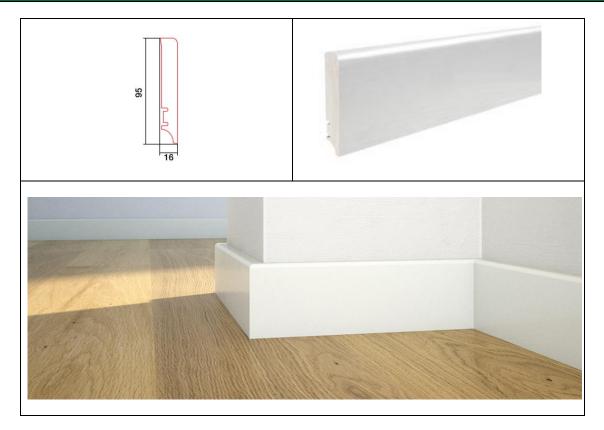

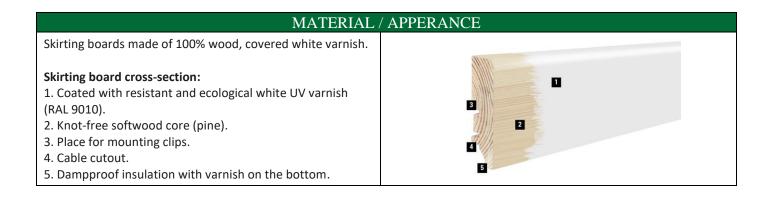

APPLICATION

Wooden skirting boards from Barlinek they are made entirely of natural softwood, finger-joined, which guarantees them extraordinary durability. The decorative surface and the edges of the slats are painted with white varnish. Such a strip does not require additional protection or painting.





COLOUR OF THE SURFACE LAYER		
Index/EAN code/catalogue number	Illustrative photo of the color of the skirting board*	
Index: LIS-SOS-LB1-220-095-P95		
Catalogue no: P9527362A EAN code: 5906737959268		

CHARACTERISTICS/ INSTALLATIONS		
The humidity of the skirting board:	9% +/-2%	
Assembly:	We recommend the use of "Barlclips" mounting clip. A detailed mounting instructions of skirting boards can be found on <u>www.Barlinek.com</u> and in the mounting instructions of Barlinek's floorboards.	
Intended use:	Rooms inside buildings with a relative air humidity of 45% to 60%	
Permissible bend deflection of a skirting board:	22 mm/ 2200mm of the length	
Blue stain of pine wood	Permissible, up to 50% of the wood surface	

THE DIMENSIONS OF AN INDIVIDUAL ELEMENT	
Length:	 2200mm Due to the lack of impact of this parameter on the mounting: Applicable tolerances are the following: one skirting board in a package can can have a +/-10mm length variation two skirting boards in a package can have a +/-5mm length variation
Width:	16mm (+/-0.5mm)
Height:	95mm (+/-0.5mm)

PACKAGE / WEIGHT	
The weight of one skirting board	1,42 kg
The number of skirting boards in the package:	10szt. = 22m
The weight of one package:	14,293 kg
Number of packages per pallet:	48 packages
Pallet weight (skirting boards + a pallet):	697 kg
The dimensions of one pallet (H/W/L)	1150mm x 800mm x 2200mm

***NOTE**: Sample skirtings boards, samples, photo- graphs and merchandising brochures may not fully correspond to the actual appearance of the products. The color of the product delivered may be different from the material available at the point of sale.

Prepared – 29.05.2023